

Safe use of LC Packaging FIBCs

CHECK THE BIG BAG

Before each use, thoroughly check the big bag for any defects, such as in the fabric, lifting loops, stitching, seams, etc.

ADHERE TO THE SAFE WORKING LOAD (SWL)

- Check the weight against the SWL on the label.
- Never exceed the maximum carrying capacity of the big bag!

KEEP THE LOOPS VERTICAL

- Make sure the loops are vertical, not at an angle or twisted/knotted when lifting the big bag.

USE ALL LOOPS


- The distance of the forks has been set to the width of the big bag.
- Always lift the big bag using all the loops, make sure the big bag is horizontal.


USE ROUNDED FORKS AND AVOID BURRS


- Ensure the forks on the forklift truck are rounded and free from sharp edges or burrs.
- If possible, use a protective layer.


lc packaging®
FIBC


Safe Working Load	1000 kg	Safety Factor	5:1
LC Packaging article No. :	123456		
LC Packaging order No. :	4500123456		
Customer article No. :	123-456		
Customer order No. :	78910		
Test Certificate No. :	9990.1/14-1		
Test Certificate Date :	31.01.2018		
Test House :	Labordata		
Test Standard :	ISO21898:2004		
FIBC Class :	Singletrip		
Production Date :	27.07.2018		



 LDPE

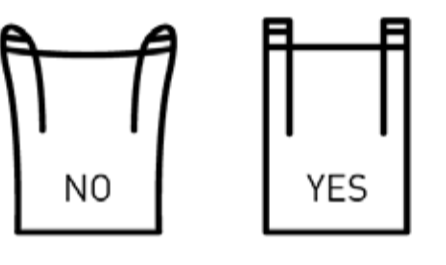

 PP


 NO YES

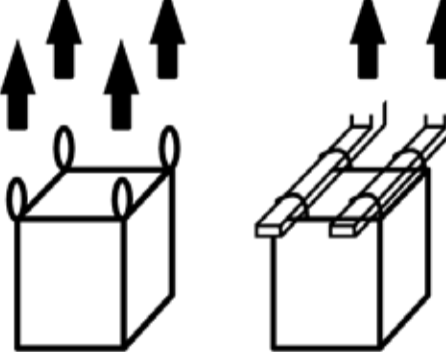
 NO NO YES


 Use all four loops!


 Avoid sharp edges!


 30° max

www.lcpackaging.com

ADHERE TO THE SAFETY FACTOR (SF)

- SF 5:1/single-trip = a single use big bag to be used for one load only.
- Single-use big bags should be recycled after unloading, but cannot be re-used!
- There are no restrictions to the number of times a big bag can be lifted.


TRANSPORT: SAFETY AND VISIBILITY FIRST

- Keep the big bag close to the mast (if necessary, tilt it backwards a little).
- Do not lift the bag too high, but high enough to clear the floor. Make sure that visibility is not diminished.
- Keep your distance from bystanders. Make sure nobody is under the big bag!
- Avoid sudden movements.

PROTECT AGAINST WEATHER INFLUENCES

- Protect the big bag against weather influences such as rain, sunlight, temperature changes etc., as much as possible.
- For example, cover the big bag with suitable protective material.

EXTRA INFORMATION FOR LIFTING USING A CRANE OR OTHER LIFTING MACHINERY

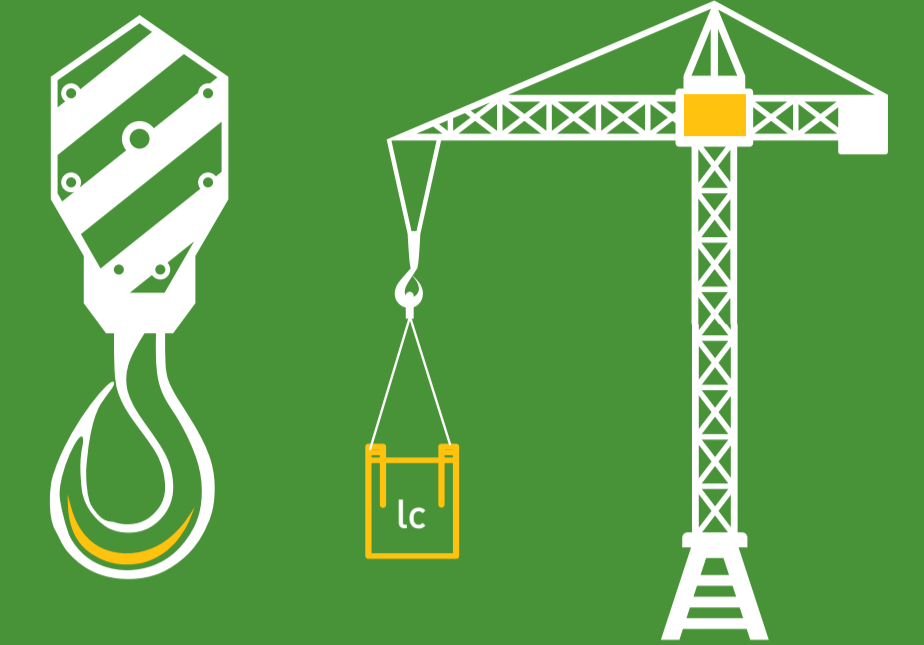

- » Check the condition of the lifting hook: no sharp edges/burrs, if necessary, use a protective layer.

- » Ensure the lifting hook has a radius of at least 5mm: prevent compressed loops.

- » Use special safety hooks, so that the big bag cannot detach from the hooks.

- » If a suitable spreader is not available, use four slings, with a length of at least 2m per sling. The angle of the chains should be greater than 60 degrees.

- » Do not lift the big bag using chains, steel cables, ropes etc. These can damage the loops when lifting.